



■ 螺杆泵组安装方式 | Screw pump installation method

① 侧进卧式安装[代号SNH]: 电机与泵安装在底座上。
Horizontal installation【Code Name SNH】: Motor and pump installed in the base, connected by the coupling.

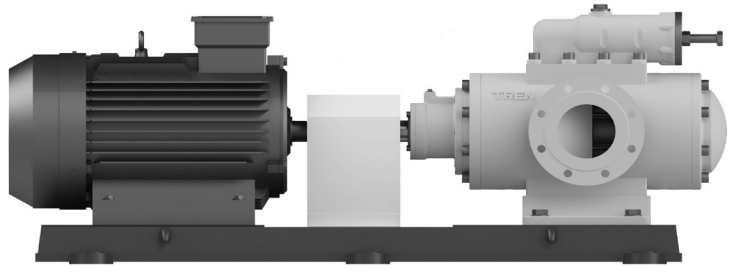


② 后进卧式安装[代号SND]: 电机与泵安装在底座上。
Rear horizontal installation【Code Name SND】: Motor and pump installed on the base.

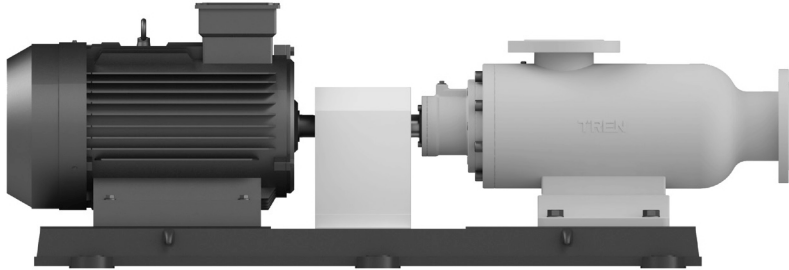

③ 立式安装[代号SNS]: 电机与泵安装在支架两端。
Vertical installation【Code Name SNS】: Motor and pump installed at both ends of the bracket, the middle by coupling connection.



④ 支架卧式安装[代号SNF]: 电机与泵安装在支架两端, 支架通过安装脚固定。
Bracket horizontal installation【Code Name SNF】: The motor and pump are installed at both ends of the bracket, and the bracket is fixed by the mounting foot.

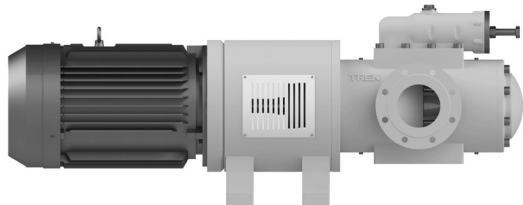

⑤ 浸没式安装[代号SNK]: 电机与泵安装在支架两端, 泵端浸没在介质中, 支架圆板固定在油箱上。
Immersion installation【Code Name SNK】: The motor and pump are installed at both ends of the bracket, the pump end is immersed in the medium, and the bracket circular plate is fixed on the fuel tank.



■ 代号说明 | Codename description

泵型号参数与代号关系说明 Description of the relationship between pump type parameters and codes												
品牌代号 Brand Code	系列代号 Serial number	安装方式代号 Installation Mode Code	螺杆规格代号 Screw specification code	螺旋角度代号 Codename of spiral angle	主杆螺旋方向代号 Main screw direction code	密封形式代号 Code name of seal form	轴承形式代号 Bearing form code	进出口方向代号 Import and export direction code	泵体材质代号 Pump body material code	衬套材质代号 Code name of bushing material	介质要求代号 Code name for me- dia requirements	特殊要求代号 Code name for spe- cial requirements
TR	SN	H(侧进卧式安装) side feed hori- zontal installation	20	-36	无代号(右旋) No Code (right- handed)	无代号(机械密封) No code(mechanical seal)	无代号(轴承内置) No code (bearing built-in)	无代号(右进左出) No Code (right in, left out)	无代号(灰铁泵体) No Code (Gray iron pump body)	无代号(球铁衬套) No code(ductile iron bushing)	无代号(润滑性液体) No code (lubricat- ing liquid)	无代号(无特殊要求) No code name (no special requirement)
		D(后进卧式安装) rear horizontal installation	40	-38	L(左旋) left-handed	Y(进口油封) import-ed oil seal	W1(轴承外置) bearing outboard	Z(左进右出) left in, right out	H(钢泵体) Welded steel pump body	Q1(铜衬套) copper bushing	C(低润滑性液体) low lubricating liquid	T(有特殊要求) with special requirements
		S(立式安装) vertical installation	80	-40					G(铸钢泵体) Cast steel pump body	Q2(铝衬套) aluminum bushing	N(粘性液体) viscous liquid	
		F(支架卧式安装) horizontal brac- ket installation	120	-42						Q12(铜铝衬套) copper- aluminum bushing		
		K(浸没式安装) immersion installation	210	-43								
			280	-44								
			440	-46								
			660	-50								
			940	-51								
			1300	-54								
			1700									
			2200									
			2900									
			3600									
			5300									
型号示例 Example	① TRSNS210-46Z 该型号表示铁人品牌SN系列立式安装泵, 螺杆规格及角度为210-46, 常规右旋螺杆, 选用机械密封, 轴承内置, 从(驱动)电机端看泵, 进出口方向为左进右出, 泵体采用灰铁泵体, 衬套采用球铁衬套, 介质为润滑性液体, 无特殊要求。 This model represents the tieren brand SN series Vertical Installation Pump, screw specifications and angle for 210-46, conventional right-hand screw, selection of mechanical seals, bearing built-in, from [drive] motor end to see the pump, the direction of import and export is left in and right out, the pump body adopts gray iron pump body, the bush adopts ductile iron bush, the medium is lubricating liquid, no special requirements.											
	② TRSNH440-40LYW1Q2CT 该型号表示铁人品牌SN系列侧进卧式安装泵, 螺杆规格及角度为440-40, 左旋螺杆, 选用进口油封, 轴承外置, 从(驱动)电机端看泵, 进出口方向为右进左出, 泵体采用灰铁泵体, 衬套采用铝衬套, 介质为低润滑性液体, 有特殊要求。 This model represents the Iron Man brand SN series side-feed horizontal installation pump, screw specifications and angle is 440-40, left screw, select imported oil seal, bearing external, from [drive] motor end to see the pump, the direction of import and export is right-in and left-out, the pump body adopts gray iron pump body, the liner adopts aluminum liner, the medium is low lubricating liquid, special requirements should be paid attention to.											
特别说明 Special notes	① 请注意无代号的默认选择项 Note the unnumbered default selection ② 螺旋规格及角度选型请参照性能参数表 Please refer to the performance parameter table for spiral specification and angle selection ③ T表示客户有特殊要求, 具体选型要求、安装尺寸在合同附件中说明 T means that the customer has special requirements, the specific selection requirements, installation size in the contract annex											