


性能表/Performance table

泵型号 Model	参考型号 Reference model	功率 Power P <sub>2</sub> (kW)	流量 Q (m <sup>3</sup> /h)	扬程 H (m)											
				2.0	3.0	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	
CVLA5-2		0.37		14	13	12	11.5	11	10	9	8	7.5	6.5	6	
CVLA5-3		0.55		19	18	16.5	15.5	15	14	13	12	11	9	8	
CVLA5-4		0.55		24.5	23	22.5	21	20	18.5	17	15.5	14	12.5	11	
CVLA5-5		0.75		30.5	29	27	26	24.5	23	21.5	20	17.5	16	14	
CVLA5-6		1.1		37	35	33	31.5	30	28	26	24	22	20	18	
CVLA5-7		1.1		43	41	39	37	35	33	31	28	26	24	21	
CVLA5-8		1.1		49	47	44	42	40	38	36	32	30	27	24	
CVLA5-9		1.5		56	53	50	47.5	45	42.5	40	37	33.5	30.5	27	
CVLA5-10		1.5		62	59	55	53	50	47	44	41	37	34	30	
CVLA5-11		2.2		68.5	65.5	61.5	59	56	52	49	45	41	37	33	
CVLA5-12		2.2		75	72.5	68	65	62	58	54	49	45	40.5	36	
CVLA5-13		2.2		81.5	79	74	71	68	64	59.5	54	49	44	39	
CVLA5-14		2.2		89	85	81	77	74	69	65	59	54	48	42	
CVLA5-15		2.2		96	93	88	84	80	75	70	64	59	52	45	
CVLA5-16		2.2		103	100	94	90	85	80	75	69	63	56	48	
CVLA5-18		3.0		115	110	104	100	96	90	85	78	71	63	54	
CVLA5-20		3.0		129	122	115	109	105	99	94	86	78	70	60	
CVLA5-22		4.0		139	134	126	121	116	110	103	95	87	77	66	
CVLA5-24		4.0		152	146	138	133	127	120	113	105	96	84	72	
CVLA5-26		4.0		164	158	150	144	138	131	122	114	104	91	78	
CVLA5-29		4.0		185	177	168	164	157	150	141	132	119	103	87	
CVLA5-32		5.5		205	197	189	183	176	166	158	147	134	114	96	
CVLA5-36		5.5		230	222	212	205	198	188	177	166	154	133	108	

安装图/Installation sketch

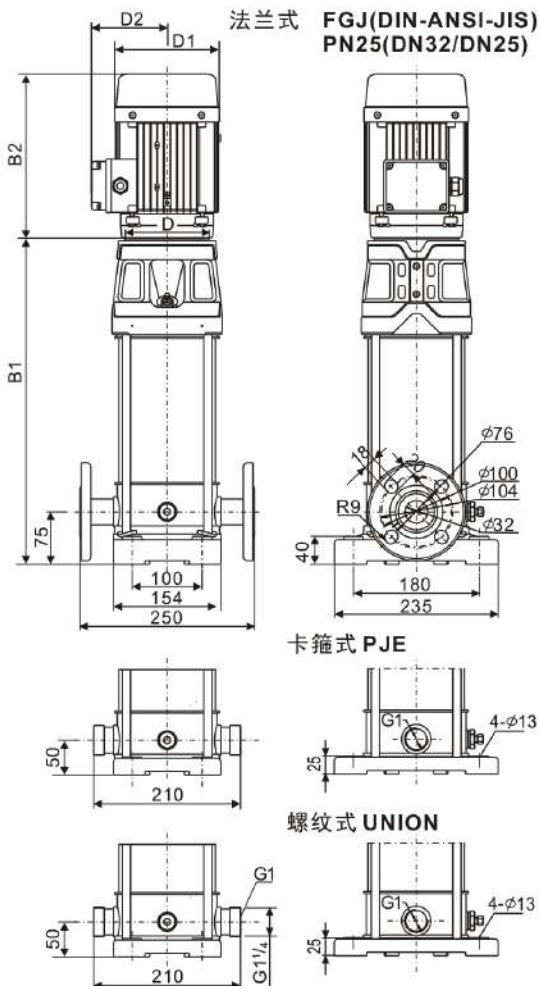

泵型号 Model	尺寸/Dimensions(mm)											
	单相 single phase				三相 Three phase				D			
	B1	B2	B1+B2	D1	D2	B1	B2	B1+B2	D1	D2	V18	V1
CVLA5-2	276	207	474	134	124	276	207	483	134	112	107	-
CVLA5-3	303	207	501	134	124	303	207	510	134	112	107	-
CVLA5-4	330	207	528	134	124	330	207	537	134	112	107	-
CVLA5-5	357	207	555	134	124	357	207	564	134	112	107	-
CVLA5-6	394	240	625	150	133	394	240	634	150	118	121	-
CVLA5-7	421	240	652	150	133	421	240	661	150	118	121	-
CVLA5-8	448	240	679	150	133	448	240	688	150	118	121	-
CVLA5-9	485	300	785	168	147	475	240	715	150	118	121	-
CVLA5-10	512	300	812	168	147	502	240	742	150	118	121	-
CVLA5-11	539	300	839	168	147	539	280	819	168	127	135	-
CVLA5-12	566	300	866	168	147	566	280	846	168	127	135	-
CVLA5-13	593	300	893	168	147	593	280	873	168	127	135	-
CVLA5-14	620	300	920	168	147	620	280	900	168	127	135	-
CVLA5-15	647	300	947	168	147	647	280	927	168	127	135	-
CVLA5-16	674	300	974	168	147	674	280	954	168	127	135	-
CVLA5-18	-	-	-	-	-	728	300	1028	168	127	135	-
CVLA5-20	-	-	-	-	-	782	300	1082	168	127	135	-
CVLA5-22	-	-	-	-	-	846	323	1169	200	146	145	-
CVLA5-24	-	-	-	-	-	900	323	1223	200	146	145	-
CVLA5-26	-	-	-	-	-	954	323	1277	200	146	145	-
CVLA5-29	-	-	-	-	-	1035	323	1358	200	146	145	-
CVLA5-32	-	-	-	-	-	1143	379	1522	212	160	185	300
CVLA5-36	-	-	-	-	-	1251	379	1630	212	160	185	300

